



Application area	Category	Order code
Facility Automation / Smart Living	multifunctional sensor KNX	4260220541127




The multi functional sensor Motion 360 KNX is suitable for ceiling mount.

It monitors movement, brightness and temperature with a detection angle of 360°.

The Motion 360 KNX comes with two dry contacts and several logic functions.

Technical data	
Power supply	
Bus operating voltage:	DC 21-30 V
Consumption of electricity:	15mA / DC 24 V
Physical connections	
Input:	DC 24 V
KNX connection:	KNX bus-clamp (red/grey) 0,8 mm ²
Supply line:	for cables up to 2,5 mm ²
Inputs:	two dry contacts
Communication	
KNX/EIB	
Construction	
Body material:	plastic white
Size:	80x80x30 mm
Weight:	60 g
Mounting:	ceiling mount
Package size:	90x94x45mm
Shipping weight:	90 g
Environmental conditions	
Working temperature:	-5°C ~ +45°C
Storage temperature:	25°C ~ +55°C
Relative humidity:	max. 95%

Functions
Luxmeter: Measures the brightness of the room to control the lighting and dimming system
Motion Detection: The sensor reacts to movements in the room and switches various functions
Additional dry contacts: Include other life-saving or security dedicated sensors to your KNX/EIB. BUS system and save cable while increasing the ability and overall function. glassbroke sensors, fire detectors, smoke detectors, door and window contacts and many more.
Integrated logic functions: Measure results can be smartly combined. Complex scenarios can be programmed with simple „if/then“ commands.
Temperature sensor

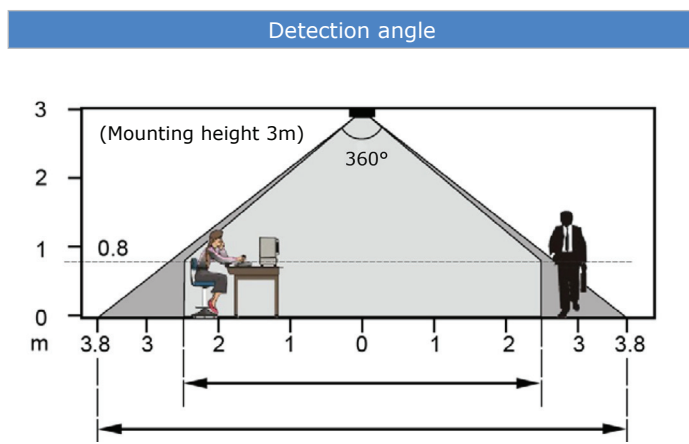

Dimensions

